


## TUBE ROLLER

Tilting Roller for Tubes and Bottles



R3010

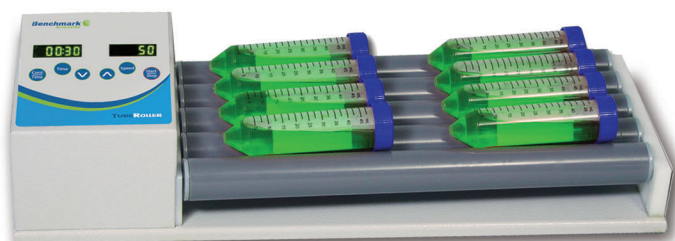

R3005

Benchmark TubeRollers are designed for the gentle, thorough mixing of a variety of containers, including Vacutainers™, bottles, test tubes, centrifuge tubes and roller bottles. Both models feature variable speed control (2-80 rpm), suitable for a broadest range of mixing applications.

As the roller mechanism rotates through each complete revolution, the right side of each roller is gently elevated about 0.5 in (13mm) and returns to the horizontal starting position. This additional, gentle up/down motion provides a "wave" effect and guarantees that the entire sample is subjected to complete, thorough mixing, end to end. This built in tilt feature provides a level of homogeneous mixing uniformity that cannot be matched by any stationary roller apparatus.

From blood collection tubes to roller bottles, Benchmark TubeRollers are the ideal choice for research, clinical laboratories and doctors' offices.

### Ordering Information

55R3005\* TubeRoller with 5 rollers, 115V  
55 R3010\* TubeRoller with 10 rollers, 115V

\* 115V with US plug. For 230V (EU plug), please add (-E)

- + Gentle rolling motion
- + Smooth +/- 5° tilt action
- + For tubes/bottles from 8mm to 200mm diameter



R3005 shown with Vacutainers™



R3005 shown with 15ml conical tubes

### Typical Sample Load Capacity:

Vessel	55 R3005	55R3010
12 x 75mm tubes	12	26
16 x 100mm tubes	8	18
16 x 125mm tubes	8	18
15ml screw cap tubes	8	18
50ml screw cap tubes	8	18
850cm <sup>2</sup> roller bottles	1	2

### Technical Data

Speed:	2 to 80 rpm
Speed Increment:	1 rpm
Motion/Tilt Angle:	Simultaneous roll & tilt (+/- 5°)
Timer:	1min to 100 hours or continuous mode
Operating Temp:	+4° to 40°C (external ambient temp.)

	R3005	R3010
Number of Rollers:	5	10
Dimensions (cm):	45 x 18 x 9	45 x 36 x 9
Dimensions (in)	18 x 7 x 3.5	18 x 14 x 3.5
Weight:	5kg / 11 lbs	8kg / 17.6 lbs

Individual Roller Dims.:	3 x 32 cm (1.2 x 12.5 in)
Vessels Accepted:	8mm to 200mm diameter
Roller Spacing:	5mm; rollers are on 35mm centers
Electrical:	120V, 60Hz or 230V, 50-60Hz
Warranty:	2 years