




BenchMixer™ V2

- + Reversible Top: Use "Cup" or "Flat/Dimpled" Surface
- + Powerful motor for INSTANT vortexing
- + Q-Drive™ dynamic balancing system
- + Variable speed with touch or continuous operation

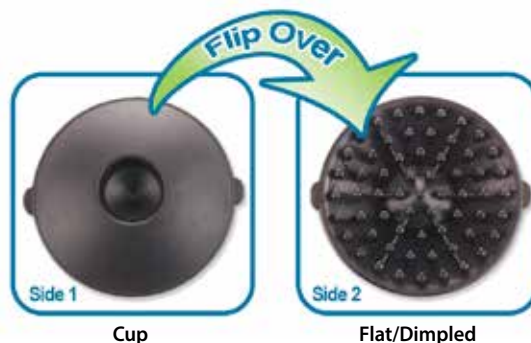


The BenchMixer™ V2 utilizes a smooth and powerful mixing technology similar to the original BenchMixer, with the advantage of a uniquely designed reversible rubber head that can be attached to the mixer in two orientations. For the vortexing of single tubes, the cupped surface would generally be preferred. However, for applications requiring a flat/dimpled surface for mixing uniquely shaped vessels (or a handful of multiple test-tubes), the head can easily be flipped over and reattached in reverse orientation.

Like the original BenchMixer, the drive system is balanced with Q-Drive™ technology, providing a smooth vortexing action, while minimizing noise and excessive vibration. This results in quieter, more efficient and longer lasting operation. With a maximum speed up to 3,200 rpm, the mixer provides an instant vortex of even the largest sample sizes, including full 50 ml tubes.

Available Accessories:



55BV1000-COMBO



55BV1003-T150



55BV1003-T500



55BV1000-H15



55BV1000-H150



55BV1000-H500

Ordering Information:



55BV1003-E



55BV1000-E

Item No.	Description:
55BV1003-E	BenchMixer V2 Vortexer (with reversible head)
55BV1000-E	BenchMixer Vortexer (original) with standard cup head
55BV1000-FLAT	Optional 7.6 cm flat head attachment (for 55BV1000-E only)
55BV1000-COMBO	Optional combination head for tubes and microplates (38 x 1.5/2.0 ml & 28 x 0.5 ml or one microplate)
55BV1003-T150	Optional head for 12 x 15 ml tubes (55BV1003-E only)
55BV1003-T500	Optional head for 5 x 50 ml tubes (55BV1003-E only)
55BV1000-H15	Optional head for 12 x 1.5/2.0 ml, horizontal
55BV1000-H150	Optional head for 4 x 15 ml tubes, horizontal
55BV1000-H500	Optional head for 2 x 50 ml tubes, horizontal

Technical Data:

Speed Range:	200 to 3,200 rpm
Operating Modes:	Touch or continuous
Orbit:	3 mm
Operating Temp. Range:	+4° C to +45° C
Dimensions: (W x D x H)	13 x 16 x 17 cm
Weight:	3.8 kg
Electrical:	230V, 50Hz / 60Hz, 180W
Warranty:	2 Years

*Dimensions of 55BV1000-E model: 13 x 17 x 17 cm