




Chemical resistance guide

| | | | | | | |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| LEVEL 0 | LEVEL 1 | LEVEL 2 | LEVEL 3 | LEVEL 4 | LEVEL 5 | LEVEL 6 |
| < 10 min | 10 > 30 min | 30 > 60 min | 60 > 120 min | 120 > 240 min | 240 > 480 min | > 480 min |

ecoSHIELD* Eco Nitrile PF 250

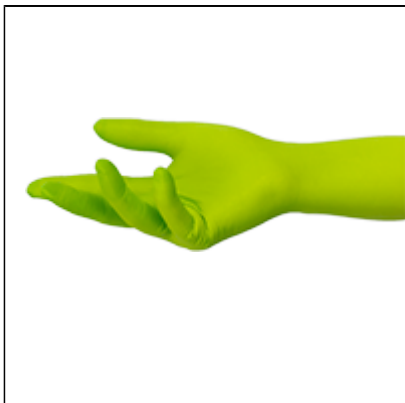

- Virus resistant
- Length: 250 mm/ 9.8"
- Palm thickness: 0.10 mm/ 3.9 mil
- Color: #008e30
- Design: Ambidextrous / Powder-free
- Allergies: Latex-free / Free of Thiazoles and Thiurams
- Chemical performance: Type B
- Mechanical risk: N/A
- ESD - Static dissipative
- Particles level: N/A / N/A
- Applications: Laboratory / General workplace / Healthcare

| | |
|-------------------------------------|---------------------------|
| 64-19-7 Acetic acid 99% | LEVEL 0 4 min |
| 67-64-1 Acetone 99.8% | LEVEL 0 0 min |
| 75-05-8 Acetonitrile 99.9% | LEVEL 0 0 min |
| 10127-02-3 Acridine orange | LEVEL 6 480 min |
| 79-06-1 Acrylamide 40% | LEVEL 6 480 min |
| 107-13-1 Acrylonitrile 99% | LEVEL 0 0 min |
| 1336-21-6 Ammonium hydroxide 25% | LEVEL 1 16 min |

| | |
|--|--------------------|
| 62-53-3 Aniline 99.9% | LEVEL 1 10 min |
| Mixed Solution Bacillol AF | LEVEL 1 22 min |
| Mixed Solution Bacillol 30 Foam | LEVEL 2 48 min |
| 71-36-3 Butanol 99.4% | LEVEL 1 25 min |
| 97-88-1 Butyl methacrylate 99.9% | LEVEL 1 10 min |
| 75-15-0 Carbon disulfide 99.9% | LEVEL 0 0 min |
| 67-66-3 Chloroform 99.8% | LEVEL 0 0 min |
| 110-82-7 Cyclohexane | LEVEL 6 480 min |
| 66-81-9 Cycloheximide | LEVEL 6 480 min |
| 75-09-2 Dichloromethane 99% | LEVEL 0 0 min |
| 109-89-7 Diethylamine 99.5% | LEVEL 0 0 min |
| 60-29-7 Diethyl ether 99% | LEVEL 0 0 min |
| 68-12-2 Dimethyl formamide 99% | LEVEL 0 1 min |
| 67-68-5 Dimethyl sulfoxide 99% (DMSO) | LEVEL 1 10 min |

| | |
|---|------------------------------|
| 64-17-5 Ethanol 99.8% | LEVEL 0 9 min |
| 64-17-5 Ethanol 70% | LEVEL 2 31 min |
| 1239-45-8 Ethidium bromide 5% | LEVEL 6 480 min |
| 141-78-6 Ethyl acetate 99.8% | LEVEL 0 0 min |
| 50-00-0 Formaldehyde 37% | LEVEL 6 480 min DR 25% |
| 75-12-7 Formamide 99% | LEVEL 1 11 min |
| 64-18-6 Formic acid 98.5% | LEVEL 0 0 min |
| 64-18-6 Formic acid 97.8% | LEVEL 0 3 min |
| Mixed Solution Hydranal ® -Composite 2 | LEVEL 6 480 min |
| 7803-57-8 Hydrazine monohydrate 98% | LEVEL 4 150 min |
| 7647-01-0 Hydrochloric acid 37% | LEVEL 3 98 min |
| 7664-39-3 Hydrofluoric acid 40% | LEVEL 0 8 min |
| 7664-39-3 Hydrofluoric acid 48% | LEVEL 0 0 min |
| 7722-84-1 Hydrogen peroxide 30% | LEVEL 6 480 min DR 35% |

| | |
|--|-----------------------------|
| 78-83-1 Isobutanol 99% | LEVEL 2 39 min |
| 67-63-0 Isopropanol 100% | LEVEL 2 33 min |
| 67-63-0 Isopropanol 70% | LEVEL 2 58 min |
| 60-24-2 2-Mercaptoethanol 99% | LEVEL 0 1 min |
| 67-56-1 Methanol 99.9% | LEVEL 0 0 min |
| 67-56-1 Methanol 20% | LEVEL 3 65 min |
| 108-87-2 Methylcyclohexane 99.9% | LEVEL 2 55 min |
| Mixed Solution Mucocit®-T branded mixture | LEVEL 6 480 min |
| 124-18-5 n-Decane | LEVEL 2 58 min |
| 142-82-5 n-Heptane 99% | LEVEL 2 43 min DR 48% |
| 110-54-3 n-Hexane 95% | LEVEL 1 28 min |
| 7697-37-2 Nitric Acid 70% | LEVEL 0 4 min |
| 7697-37-2 Nitric acid 65% | LEVEL 0 6 min |
| 64742-49-0 Petroleum benzene 80-100°C | LEVEL 6 480 min |

| | |
|---|------------------------------|
| 108-95-2 Phenol 50% | LEVEL 1 15 min |
| 108-95-2 Phenol 0.1% solution | LEVEL 6 480 min |
| 7664-38-2 Phosphoric Acid 30% | LEVEL 6 480 min |
| 1310-58-3 Potassium Hydroxide 40% | LEVEL 6 480 min |
| 7722-64-7 Potassium permanganate 6.5% | LEVEL 4 153 min |
| 75-56-9 Propylene oxide 99% | LEVEL 0 0 min |
| 110-86-1 Pyridine | LEVEL 0 0 min |
| 598-75-4 Secondary isoamyl alcohol 98% | LEVEL 2 30 min |
| 127-09-3 Sodium acetate Sat. solution | LEVEL 6 480 min |
| 1310-73-2 Sodium Hydroxide 40% | LEVEL 6 480 min DR 10% |
| 1310-73-2 Sodium Hydroxide 50% | LEVEL 6 480 min |
| 7681-52-9 Sodium Hypochlorite 13% | LEVEL 6 480 min |
| 100-42-5 Styrene 99.9% | LEVEL 0 0 min |
| 5329-14-6 Sulfamic Acid 15% | LEVEL 6 480 min |

| | |
|--|---------------------------|
| 7664-93-9 Sulphuric Acid 10% | LEVEL 6 480 min |
| 7664-93-9 Sulphuric Acid 95%-98% | LEVEL 0 0 min |
| 7664-93-9 Sulphuric Acid 50% | LEVEL 6 480 min |
| Mixed Solution Terralin protect | LEVEL 1 13 min |
| 109-99-9 Tetrahydrofuran 99.9% | LEVEL 0 0 min |
| 75-59-2 Tetramethylammonium hydroxide 2.5% | LEVEL 6 480 min |
| 584-84-9 Toluene diisocyanate 95% | LEVEL 0 0 min |
| 76-05-1 Trifluoroacetic acid 99% | LEVEL 0 0 min |
| 77-86-1 Tris (hydroxymethyl) aminomethane Sat. solution | LEVEL 6 480 min |
| 1330-20-7 Xylene 98.5% | LEVEL 0 2 min |

DISCLAIMER: The data provided was based on gloves tested under laboratory conditions, in accordance with EN 16523-1:2015 (formerly EN 374-3:2003) and EN 374-4:2013. The information is for guidance only and may not reflect the user's application. A risk assessment should always be made by purchaser to assess the suitability of gloves for a specific application.